

RUBWAX 1250

TECHNICAL DATA SHEET

Issue No
002/02

Revision Date
11-03-2018


Product Name: RUBWAX 1250

Micro Crystalline Wax / Anti Ozone Wax

Composition: Blend of Paraffin waxes and Microcrystalline Waxes

Typical Properties:

	Appearance	Specific Gravity	Congealing Point, °C	Ash Content	N-Paraffin Content	C Max
RUBWAX 1250	White to Light Yellow Pastilles	0.92	64 – 68	0.1 Max	60 - 70	30 - 32

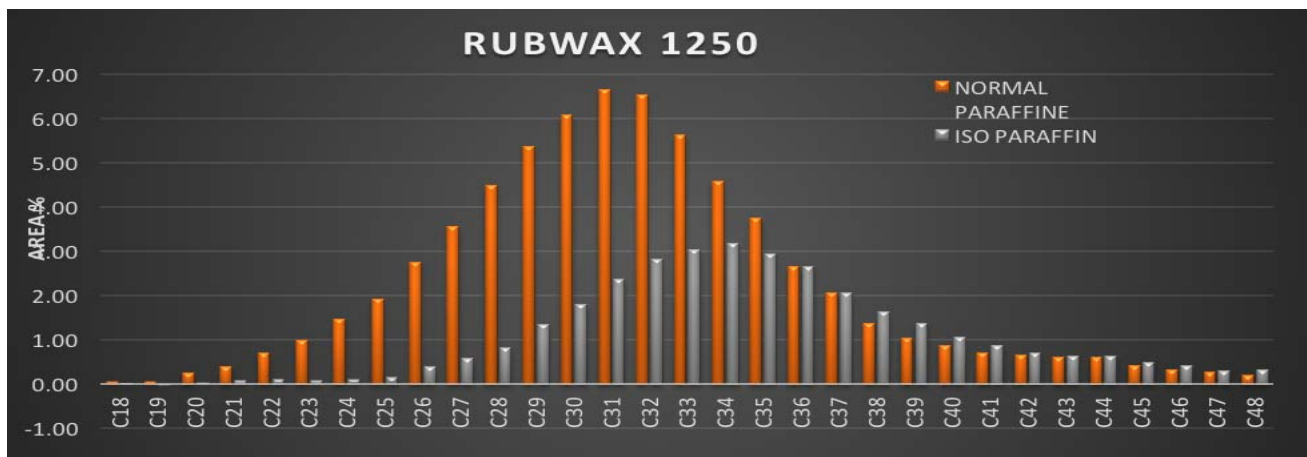

Storage Stability: Two years under normal storage condition

Suggestions / Recommendations for Applications:

RUBWAX 1250 provides an optimal resistance to Ozone and UV aging and significantly improves the mechanical properties of rubber. It has been formulated to give best protection against ozone attack, especially in a temperature range of 10 – 50 C. Because of the ideal combination of Iso and Normal component, excellent migration is achieved and also ensures the formation of a thin layer of wax on the surface of the tire.

Note:

Application and usage of our products as well as possible proposed formulations are meant to advise only to the best of our knowledge. This information is without obligation and does not release customers from their own testing to ensure suitability for intended processes and use. Each producer is responsible and liable to observe legislation and patent rights of third parties. We accept no liability for any use or application unless explicitly stated by us. These data are not to be considered as specification.

RAJSHA CHEMICALS PRIVATE LIMITED
www.twc.in

Works:
Block No.: 637, Lamdapura Road, At. Manjusar
PO: Lamdapura, Ta: Savli, Dist. Vadodara 391 775, India
Tel – +91 9662049271
Email – office@rajsha.com

Head Office:
3C Hi Tech Chambers, 84/1B Topsia Road (S)
Kolkata 700 046, West Bengal, India
Tel – 2285 1278 / 1279. Fax - +91 33 2285 1280
E mail – info@twc.in